

Tracking Control for Unmanned Aerial Vehicles with Time-Delays Based on Event-Triggered Mechanism

Min Zhang^{*, **}, Zhengtao Ding^{***}
Jing Huang^{*, **}, Tingxuan Huang^{*, **}

^{*} Shanghai Aerospace Control Technology Institute, Shanghai, 201109, PR China

^{**} Shanghai Key Laboratory of Aerospace Intelligent Control Technology, Shanghai, 201109, PR China (e-mail: anne.zm@163.com)

^{***} Control Systems Centre, School of Electrical and Electronic Engineering, University of Manchester, Manchester, M13 9PL, United Kingdom (e-mail: zhengtao.ding@manchester.ac.uk)

Abstract: A position tracking control approach is presented for quad-rotor unmanned aerial vehicles (UAVs) with multiple state time-delays and external disturbances based on an event-triggered mechanism. This approach achieves the desired performance by using less control execution, which results in a reduction in the usage rate of the onboard embedded microprocessor. First, the basic control structure is formed by a weighted multiple-model method. Next, the event-triggered mechanism is designed in such a way to achieve an aperiodic control approach. This is done by embedding the mechanism into the existing control structure. Additionally, the negative influence of time-delays and external disturbances are considered using a linear matrix inequality (LMI) technique based on a Lyapunov function. This allows the coefficients of the controller and event-triggered mechanism to be obtained. Consequently, the system can be stabilized and performs robustly. The position tracking control approach is applied to a quad-rotor UAV and the simulation results confirm its effectiveness.

Keywords: event-triggered control; tracking control; UAV; time-delay; robust control

1. INTRODUCTION

Quad-rotor unmanned aerial vehicles (UAVs) are used extensively in aerial photography, exploratory operations, and disaster relief, since they have the advantages of these contraptions: high manoeuvrability, capability for controlled vertical ascent and descent, and long hover times. On the one hand, UAV systems generally display nonlinearity, uncertainties and coupling. On the other hand, the performance of UAV is often influenced by external disturbances, signal transmission time-delay, and actuation failures during flight (Amin et al., 2016; Amoozgar et al., 2013; Bateman et al., 2011). So numerous control methods have been presented in the academic literatures to deal with the problem mentioned of UAV. In addition, another challenge for UAVs is to improve the usage rate of computation and communication resources to satisfy the operational requirements with limited power. This problem is generally solved by using a high-performance onboard microprocessor and a higher power system (Yang and Liu, 2017; Idres et al., 2015). Alternatively, an event-triggered mechanism can be used, which is able to reduce usage rates of computation and communication resource with less control execution.

Control of UAVs is achieved with an onboard embedded microprocessor unit. When higher control performance is required, more complex control algorithms must be implemented. This results in the onboard microprocessor having to deal with larger volumes of data and being limited

to do more missions. Consequently, a method to improve control performance with low computation resource consumption in the embedded or networked system must be realized. For example, event-triggered control (ETC) for networked and embedded control systems is widely recognized for its aperiodic control mechanism, which optimizes the usage of communication and computation resources in the system (Mazo and Tabuada, 2008; Heemels et al., 2012).

ETC differs from traditional control because its control execution depends on the occurrence of an event, which is triggered under certain conditions. The number of control execution can be reduced along with satisfactory closed loop response (Dhar et al., 2018). ETC problems have been widely researched. The ETC model-based approach was proposed by Heemels and Donkers (2013) for linear system's stability. Tabuada (2007) proposed an event-triggered algorithm for nonlinear systems to ensure global asymptotic stability. ETC was applied in decentralized systems by Mazo and Tabuada (2011). The application of ETC in hybrid systems was presented by Postoyan et al. (2011). ETC is very popular for networked control systems (NCSs). For example, Wang and Lemmon (2011) use ETC for NCS to guarantee the asymptotic stability of the entire system. Application of ETC is investigated for systems with time-delays and uncertainties, as presented by Wu et al. (2015) and Sahoo et al. (2016). In this paper, ETC is used to guarantee satisfactory control performance of a UAV and reduce computation demands on the onboard embedded microcomputer.

The dynamic characteristics of UAVs result in nonlinearity and uncertainties in the control system (Besnard et al., 2012). Generally, UAVs are controlled based on linear models of their dynamics, as obtained at the equilibrium points (within allowable approximation error). The linear model is sufficient for control of the UAV when cruising or hovering. However, the linear model would not ensure the desired control performance when the UAV is accelerating from certain equilibrium (because of increased nonlinearity). When the model nonlinearity cannot be ignored (in certain cases), position tracking control for the UAV becomes difficult. We adopt a weighted multiple-model control method to address the model nonlinearity. The control algorithm, designed based on a weighted-multiple-model method, is formed by combining several linear models at different equilibrium points with corresponding weight functions (Zhang, 2013; Xiao et al., 2010). The control system of the UAV can be stabilized by adjusting the control parameters, with the flight state altering to match the current dynamic model.

In fact, the whole control system of UAV consists of one or more UAV bodies, a base station computer and a set of space position sensors. The base station computer monitors flight status and sets the flight path. The position sensors measure and transmit position signals via a wireless network. The flight system is directly controlled by the onboard embedded microcomputer, which receives and processes signals from the base station computer and the position sensors to determine the necessary control signal. This is computed using the control algorithm and then sent to the actuator (Yang et al., 2017). The control system of UAV is different from a traditional flight control system. The former must use a wireless network to transmit signals during flight, while the latter does not. Wireless communication causes time-delays in the control system of the UAV, which can influence the control performance and even cause system instability. It would be difficult to achieve satisfactory control performance for an actual UAV without accounting for the time-delays in the control system design. For a practical control approach, it is necessary to design the control law to reduce the negative influence of time-delays. Additionally, UAV control must overcome external disturbances, which occur for any flight vehicle (Bouadi et al., 2015; Xiong and Zheng, 2014). In this paper, a robust control method based on LMI technology is used to overcome both external disturbances and time-delays (Mobayen, 2015; Zhang et al., 2015).

Specifically, a position tracking control approach for quad-rotor UAVs based on an event-triggered mechanism is proposed. A weighted-multiple-model control structure is designed for nonlinear tracking control systems. LMI technology is used to obtain the coefficients of the controller and the event-triggered mechanism (using Lyapunov functions) to stabilize the tracking system within given bounds for external disturbances and state time-delays. Lower computation resources with less control output updating than that of traditional periodic control is attained. Consequently, the usage rate of onboard microprocessor is improved, resulting in more powerful data-handling capacity.

This paper is divided into four parts and is organized as follows. Section 2 presents problem formulation. Section 3 describes the design of tracking controller based on event-triggered mechanism. Finally in Section 4 simulation results are presented followed by conclusions.

2. PROBLEM FORMULATION

2.1 System modelling

This paper focuses on position tracking control of quad-rotor UAVs, and their mathematics model is discussed first of all. Without generality, some hypotheses are listed as below.

- (1) The UAV has a symmetric homogeneous rigid body, and keeps mass constant during its flight;
- (2) The air resistance and gyroscopic effect can be ignored;
- (3) The distance between the center of aircrew and that of body mass can be ignored;
- (4) The aircrew is light enough and its rotary inertia can be ignored;
- (5) Earth-fixed frame is the inertia frame, and the effect of earth curvature and gravitational acceleration alteration with altitude can be ignored;
- (6) The centre-mass of UAV is the origin of body-fixed frame.

According to the above hypotheses of flight dynamics, the dynamic position system of UAVs can be obtained as follows,

$$\begin{cases} m\ddot{X} = (\cos\varphi \sin\theta \cos\psi + \sin\varphi \sin\psi)U \\ m\ddot{Y} = (\cos\varphi \sin\theta \sin\psi - \sin\varphi \cos\psi)U \\ m\ddot{Z} = mg - (\cos\varphi \cos\theta)U \end{cases}, \quad (1)$$

where m = body mass, ψ = yaw angle, θ = pitch angle, and φ = roll angle. (X, Y, Z) = body location in the earth-fixed frame; U = total thrust force generated by four rotors and each of thrust force F_e can be defined as follows,

$$F_e = L \frac{\omega}{s + \omega} u, \quad (2)$$

where u = PWM (Pulse Width Modulation) which is the input to each actuator, ω = actuator bandwidth, and L = positive gain. v = state variable represented the actuator dynamics of each rotor, which can be described as follows,

$$v = \frac{\omega}{s + \omega} u. \quad (3)$$

The actuators of quad-rotor UAVs are four brushless DC motor whose speed is controlled by the duty cycle of PWM, and so the inputs of these motors are the inputs of the UAV control system. Here, this paper takes X-axis position as the controlled variable, designing the specific control algorithm. According to the dynamic analysis, the body movement on X-axis is mainly influenced by the total thrust and pitch angle θ . Hence, it assumes that yaw angle and roll angle are both zero, i.e. $\psi = \varphi = 0$, and just considers the influence of the

pitch angle θ to obtain the following dynamic description of X-axis position from equations (1)-(3),

$$\begin{bmatrix} \dot{X} \\ \ddot{X} \\ \dot{v} \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & \frac{4L}{m}\sin\theta \\ 0 & 0 & -\omega \end{bmatrix} \begin{bmatrix} X \\ \dot{X} \\ v \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \omega \end{bmatrix} u. \quad (4)$$

Choose the position in X-axis, the velocity in X-axis and the actuator dynamics to form state variable of the system, i.e. $x = [X, \dot{X}, v]^T$; Letting u = control input and y = output, and the position control system(4) can be rewritten in standard form,

$$\begin{cases} \dot{x}(t) = Ax(t) + Bu(t) \\ y(t) = Cx(t) \end{cases}, \quad (5)$$

$$\text{where } A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & \frac{4L}{m}\sin\theta \\ 0 & 0 & -\omega \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ 0 \\ \omega \end{bmatrix}, \quad C = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}^T.$$

2.2 Time-delays in the control system

The control system of quad-rotor UAVs contains: one or more UAV bodies, space position sensors, and a control based station. When the UAV flights, it has to receive signals of space position, flight commands and control parameter settings via wireless network, so that to generate control input by onboard embedded microprocessor computing designed control algorithm. At the same time, the UAV sends all kinds of flight state signals to the ground control base station via wireless network. Obviously, the wireless network is necessary for the UAV control system, and the time-delays caused by network transmission cannot be ignored. In most cases, the delay signals can be described as state time-delay variables in the system mathematic description.

Define the output error as $e = y - y_d = Cx - y_d$, where y_d = given desired output. Taking the external disturbances and multiple state time-delays into consideration, the following augmented system as tracking control system can be obtained from (5),

$$\dot{\bar{x}}(t) = \bar{A}\bar{x}(t) + \sum_{k=1}^h \bar{A}_k \bar{x}(t - \tau_k) + \bar{B}u(t) + \varphi(t), \quad (6)$$

$$\text{where } \bar{A} = \begin{bmatrix} 0 & C \\ 0 & A \end{bmatrix}, \quad \bar{B} = \begin{bmatrix} 0 \\ B \end{bmatrix}, \quad \bar{A}_k = \begin{bmatrix} 0 & 0 \\ 0 & A_k \end{bmatrix},$$

$\varphi(t) = \begin{bmatrix} -y_d \\ g(t) \end{bmatrix}^T$, $\bar{x} = [(\int_0^t e(\tau) d\tau)^T \ x(t)^T]^T$ and $\varphi(t)$ is the bounded external disturbance.

3. DESIGN of TRACKING CONTROLLER BASED ON EVENT-TRIGGERED MECHANISM

3.1 Design of weighted multiple-model control system

In many literatures about UAV control, it is used to adopt the approximation that $\sin\theta \approx \theta$ to make the system linearized. This paper focuses on position tracking control in X-axis, and in this case, the pitch angle θ has the possibility to alter within a wide range. Consequently, the model nonlinearity becomes more powerful, which cannot be ignored in the design of tracking control law. In order to address this problem, a kind of weighted-multiple-model method is utilized as the basic control structure for the tracking system. First of all, several system models at different pitch angles are established, and among them, the i -th model at pitch angle θ_i can be described as follows.

$$I_i: \dot{\bar{x}}(t) = \bar{A}_i \bar{x}(t) + \sum_{k=1}^h \bar{A}_{ik} \bar{x}(t - \tau_k) + \bar{B}u(t) + \varphi(t), \quad (7)$$

$$\text{where } \bar{A}_i = \begin{bmatrix} 0 & C \\ 0 & A_i \end{bmatrix} \in R^{n \times n}, \quad A_i = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & \frac{4L}{m}\sin\theta_i \\ 0 & 0 & -\omega \end{bmatrix},$$

$$\bar{A}_{ik} = \begin{bmatrix} 0 & 0 \\ 0 & A_{ik} \end{bmatrix} \in R^{n \times n}, \text{ and } \bar{B} \in R^{n \times m}.$$

The weighted-multiple-model structure adopted in the paper includes N subsystems. Each subsystem is denoted as $\{I_i\}_{i=1}^N$, and all of them are operating simultaneously. At every instant, the error $\tilde{e}_i = y - y_c$ caused by comparing the output y of the model I_i with that y_c of the current controlled system is evaluated to generate i -th quadric performance value J_i that denotes the match level between the model I_i and the current system.

Obviously, the weighted-multiple-model approach can update the weight coefficient of each model adaptively by comparing the current system state. Different from normal multiple-model structure which has several controllers switched, the weighted-multiple-model approach has only one controller to make the system controlled continuously, avoiding the performance deterioration caused by high frequent switching.

Define the following quadratic index to evaluate the match level between the model I_i and the current system,

$$J_i(t) = a \|\tilde{e}_i(t)\|^2 + b \int_0^t \exp(-\rho(t-\tau)) \|\tilde{e}_i(\tau)\|^2 d\tau, \quad (8)$$

where $(a \geq 0, b > 0)$ = given constants, and $(\rho > 0)$ = memory factor. Then the weight coefficient of the model I_i is designed as,

$$\alpha_i(t) = \frac{\exp(-|J_i(t)|^2/\delta)}{\sum_{i=1}^N \exp(-|J_i(t)|^2/\delta)}, \quad (9)$$

where $\delta =$ given positive scalar. Obviously, $0 < \alpha_i(t) < 1$, and $\sum_{i=1}^N \alpha_i(t) = 1$. When $\alpha_i(t) \rightarrow 1$ and $\alpha_j(t) \rightarrow 0$ ($j \neq i$), the model I_i matches the current actual system most perfectly. According to (7) and (9), the whole controlled system can be expressed as follows,

$$\dot{\bar{x}}(t) = \sum_{i=1}^N \alpha_i(t) [\bar{A}_i \bar{x}(t) + \sum_{k=1}^h \bar{A}_{ik} \bar{x}(t - \tau_k)] + \bar{B}u(t) + \varphi(t). \quad (10)$$

For (10), the weighted-multiple-model controller is presented,

$$u_f(t) = \sum_{i=1}^N \alpha_i(t) K_i \bar{x}(t), \quad (11)$$

where $K_i =$ control gain matrix.

3.2 Design of control law based on event-triggered mechanism

In this section, an event-triggered mechanism is presented to improve the weighted-multiple-model control structure, forming aperiodic tracking control law. The event-triggered mechanism can judge whether the triggering condition is satisfied or not through using the received state information. If the condition was satisfied, the event-triggered mechanism would release signal to the controller, triggering the control execution, otherwise, it would not release triggering signal and the control output would remain unchanged by zero-order holder. Assuming that $h =$ sampling period and $\{t_0, t_1, t_2, \dots\} =$ triggering instant set, $t_k =$ current triggering instant at which control output updates, therefore, the next triggering instant t_{k+1} can be designed as follows,

$$t_{k+1} = \inf\{t > t_k \mid \bar{e}^T(t_k) \Phi \bar{e}(t_k) > \kappa \bar{x}^T(t) \Phi \bar{x}(t)\}, \quad (12)$$

where $t = t_k + nh$, $n = 0, 1, 2, 3, \dots$, $\kappa =$ given bounded positive real number, and $\Phi =$ symmetric positive matrix. Comparing the state vector at the last triggering instant with that at the current instant, the error is defined as $\bar{e}(t_k) = \bar{x}(t_k) - \bar{x}(t)$.

It is clear that the control execution time set, i.e. event-triggering instant set $\{t_0, t_1, t_2, \dots\}$ is the subset of the sampling time set $\{0, h, 2h, \dots\}$. Since the control executes according to the event rather than the sampling period, the computation of controller can be reduced under the presented event-triggered mechanism. Especially, when $\kappa = 0$, the event-triggered mechanism becomes the traditional periodic

control mechanism, i.e. $\{t_0, t_1, t_2, \dots\} = \{0, h, 2h, \dots\}$. The controller (11) based on event-triggered mechanism (12) can be expressed as,

$$u(t) = \sum_{i=1}^N \alpha_i(t_k) K_i \bar{x}(t_k). \quad (13)$$

If $t \in [t_k, t_{k+1})$, the closed loop expression of the system can be described as follows from (10) and (13),

$$\dot{\bar{x}}(t) = \sum_{i=1}^N \alpha_i(t) [\bar{A}_i \bar{x}(t) + \sum_{k=1}^h \bar{A}_{ik} \bar{x}(t - \tau_k)] + \sum_{i=1}^N \alpha_i(t_k) \bar{B} K_i \bar{x}(t_k) + \varphi(t). \quad (14)$$

Based on the approach proposed by Peng et al. (2014), the following equation holds assuming that there are real numbers ρ_j and Δ_j ,

$$\alpha_j(t_k) = \rho_j \alpha_j(t), \quad |\alpha_j(t_k) - \alpha_j(t)| \leq \Delta_j, \quad (15)$$

So that, if $t \in [t_k, t_{k+1})$, the controller (13) can be further converted to,

$$u(t) = \sum_{i=1}^N \rho_i \alpha_i(t) K_i \bar{x}(t_k). \quad (16)$$

And the system (14) can be rewritten as

$$\dot{\bar{x}}(t) = \sum_{i=1}^N \alpha_i(t) [\bar{A}_i \bar{x}(t) + \bar{B} \rho_i K_i \bar{x}(t_k) + \sum_{k=1}^h \bar{A}_{ik} \bar{x}(t - \tau_k)] + \varphi(t). \quad (17)$$

Letting $\bar{K}_i = \rho_i K_i$, (17) becomes

$$\dot{\bar{x}}(t) = \sum_{i=1}^N \alpha_i(t) [\bar{A}_i \bar{x}(t) + \bar{B} \bar{K}_i \bar{x}(t) + \sum_{k=1}^h \bar{A}_{ik} \bar{x}(t - \tau_k) + \bar{B} \bar{K}_i \bar{e}(t_k)] + \varphi(t) \quad (18)$$

Lemma 1 (Gu et al. 2001): For arbitrary $x_1 \in R^m$, $x_2 \in R^n$, $M \in R^{m \times n}$, and arbitrary positive definite matrix $N \in R^{n \times n}$, there is

$$x_1^T M x_2 + x_2^T M^T x_1 \leq x_1^T M N^{-1} M^T x_1 + x_2^T N x_2. \quad (19)$$

Next, the influence of external disturbances and state time-delays will be considered in the following content. Here choose the following H_∞ performance index,

$$J = \frac{1}{\gamma} \int_0^{t_f} \bar{x}(t)^T R \bar{x}(t) dt - \gamma \int_0^{t_f} \varphi(t)^T \varphi(t) dt < 0, \quad (20)$$

where $t_f =$ finished time of control, $\gamma =$ given constant which denotes the effect of $\varphi(t)$ on $x(t)$, and $R =$ given positive definite weighted matrix.

Theorem 1: If there are a symmetric positive definite matrix $P \in R^{n \times n}$, a set of matrix $\bar{K}_i \in R^{m \times n}$ ($i = 1, \dots, q$), and a set of scalars $\sigma_k > 0$ ($k = 1, \dots, h$), so that the following LMI (21) holding, the controller (13) can make the system (10) stable within the given H_∞ bound γ .

$$\begin{bmatrix} \Gamma_i & * & * & * \\ A_{di}^T & -\sigma & * & * \\ Q & 0 & -\Theta^{-1} & * \\ E_i^T & 0 & 0 & -\Phi \end{bmatrix} < 0, \quad (21)$$

where

$$\begin{aligned} \Gamma_i &= (\bar{A}_i + \bar{B}\bar{K}_i)Q + Q(\bar{A}_i + \bar{B}\bar{K}_i)^T + (1/\gamma)I_{n \times n}, \quad Q = P^{-1}, \\ \Theta &= \frac{1}{\gamma}R + I\sigma^T + \kappa\Phi, \quad \sigma = \text{diag}(\sigma_1 I_{n \times n}, \dots, \sigma_h I_{n \times n})_{h n \times h n}, \\ A_{di} &= [\bar{A}_{i1}, \dots, \bar{A}_{ih}]_{n \times h n}, \quad I = [I_{n \times n}, \dots, I_{n \times n}]_{n \times h n}, \quad E_i = \bar{B}\bar{K}_i. \end{aligned}$$

$I_{n \times n} = n$ -dimensional unit matrix, and $*$ = transposed elements corresponding to the symmetric position in the matrix.

Proof: Choose the Lyapunov function as

$$V(\bar{x}) = \bar{x}(t)^T P \bar{x}(t) + \sum_{k=1}^h \int_{t-\tau_k}^t \sigma_k \bar{x}(s)^T \bar{x}(s) ds. \quad (22)$$

Obviously, $V(\bar{x}) > 0$, $\forall \bar{x} \neq 0$. The derivative of the Lyapunov function (22) is

$$\begin{aligned} \dot{V}(\bar{x}) &= \dot{\bar{x}}(t)^T P \bar{x}(t) + \bar{x}(t)^T P \dot{\bar{x}}(t) + \sum_{k=1}^h \sigma_k \bar{x}(t)^T \bar{x}(t) - \sum_{k=1}^h \sigma_k \bar{x}(t-\tau_k)^T \bar{x}(t-\tau_k) \\ &= \sum_{i=1}^N \alpha_i(t) \left\{ \bar{x}^T(t) (H_i^T P + P H_i) \bar{x}(t) + \bar{e}^T(t_k) E_i^T P \bar{x}(t) + \bar{x}^T P \bar{E}_i \bar{e}(t_k) \right. \\ &\quad \left. + \sum_{k=1}^h [\bar{x}(t-\tau_k)^T \bar{A}_{ik}^T P \bar{x}(t) + \bar{x}(t)^T P \bar{A}_{ik} \bar{x}(t-\tau_k)] \right\} \\ &\quad + \bar{x}(t)^T P \phi(t) + \phi(t)^T P \bar{x}(t) + \sum_{k=1}^h \sigma_k \bar{x}(t)^T \bar{x}(t) - \sum_{k=1}^h \sigma_k \bar{x}(t-\tau_k)^T \bar{x}(t-\tau_k), \end{aligned} \quad (23)$$

where $H_i = \bar{A}_i + \bar{B}\bar{K}_i$. According to Lemma 1 and event-triggered condition (12), the following inequality can be obtained from (23),

$$\begin{aligned} \dot{V}(\bar{x}) &\leq \sum_{i=1}^N \alpha_i(t) \{ \bar{x}(t)^T (H_i^T P + P H_i + P A_{di} \sigma^{-1} A_{di}^T P + \kappa\Phi + P B_i \Phi^{-1} E_i^T P + \\ &\quad I\sigma^T + \frac{1}{\gamma} P P) \bar{x}(t) + \gamma \phi(t)^T \phi(t) \}. \end{aligned} \quad (24)$$

Then consider performance index (20),

$$J = \int_0^{t_f} \left(\frac{1}{\gamma} \bar{x}(t)^T R \bar{x}(t) - \gamma \phi(t)^T \phi(t) \right) dt$$

$$= \int_0^{t_f} \left(\frac{1}{\gamma} \bar{x}(t)^T R \bar{x}(t) - \gamma \phi(t)^T \phi(t) + \dot{V} \right) dt - V(t_f) + V(0). \quad (25)$$

It is obvious that $V(0) = 0$, $V(t_f) > 0$. Substituting (24) into (25), it yields

$$\begin{aligned} J &< \int_0^{t_f} \left(\frac{1}{\gamma} \bar{x}(t)^T R \bar{x}(t) - \gamma \phi(t)^T \phi(t) + \dot{V} \right) dt \\ &= \sum_{i=1}^N \alpha_i(t) \int_0^{t_f} \bar{x}(t)^T \left(S + P E_i \Phi^{-1} E_i^T P + \frac{1}{\gamma} P P + \frac{1}{\gamma} R \right) \bar{x}(t) dt, \end{aligned}$$

where $S = H_i^T P + P H_i + P A_{di} \sigma^{-1} A_{di}^T P + I\sigma^T - \kappa\Phi$. If

$$S + P E_i \Phi^{-1} E_i^T P + \frac{1}{\gamma} P P + \frac{1}{\gamma} R < 0, \quad (26)$$

the inequality $J < 0$ holds, i.e. $\int_0^{t_f} \bar{x}(t)^T R \bar{x}(t) dt \leq \gamma^2 \int_0^{t_f} \|\phi(t)\|^2 dt$ holds.

Consequently, multiplying (26) by Q both in left and right, it yields

$$\begin{aligned} &Q S Q + E_i \Phi^{-1} E_i + \frac{1}{\gamma} I_{n \times n} + \frac{1}{\gamma} Q R Q \\ &= Q H_i^T + H_i Q + A_{di} \sigma^{-1} A_{di}^T + Q I \sigma^T Q - \kappa Q \Phi Q - E_i \Phi^{-1} E_i^T \\ &\quad + \frac{1}{\gamma} I_{n \times n} + \frac{1}{\gamma} Q R Q \\ &= (\bar{A}_i + \bar{B}\bar{K}_i)Q + Q(\bar{A}_i + \bar{B}\bar{K}_i)^T + \frac{1}{\gamma} I_{n \times n} + \frac{1}{\gamma} Q R Q \\ &\quad + A_{di} \sigma^{-1} A_{di}^T + Q I \sigma^T Q + \kappa Q \Phi Q + E_i \Phi^{-1} E_i^T \\ &= (\bar{A}_i + \bar{B}\bar{K}_i)Q + Q(\bar{A}_i + \bar{B}\bar{K}_i)^T + \frac{1}{\gamma} I_{n \times n} + A_{di} \sigma^{-1} A_{di}^T \\ &\quad + Q \left(\frac{1}{\gamma} R + I\sigma^T + \kappa\Phi \right) Q + E_i \Phi^{-1} E_i^T < 0 \end{aligned} \quad (27)$$

Let $\Gamma_i = (\bar{A}_i + \bar{B}\bar{K}_i)Q + Q(\bar{A}_i + \bar{B}\bar{K}_i)^T + (1/\gamma)I_{n \times n}$, $\Theta = \frac{1}{\gamma}R + I\sigma^T + \kappa\Phi$. Based on Schur complement theorem,

$$(27) \text{ can be converted to } \begin{bmatrix} \Gamma_i & * & * & * \\ A_{di}^T & -\sigma & * & * \\ Q & 0 & -\Theta^{-1} & * \\ E_i^T & 0 & 0 & -\Phi \end{bmatrix} < 0,$$

which is the LMI in theorem 1. The proof is completed.

4. SIMULATION RESULTS

This paper applies the proposed tracking control approach to the UAV "Qball-X4" developed by Quanser Inc, and carries on the simulation for X-axis position tracking, in order to illustrate the effectiveness of the control approach.

Set that the original states are: $X = 0$, $\dot{X} = 0$, $v = 1$, and the external disturbance is the random noise with the mean value is 0 and the variance is 0.1. The desired position value is given as $X_d = 5$. The other parameter values are given as follows:

$$\tau_1 = 0.8, \tau_2 = 1, \gamma = 1, \kappa = 0.1, a = b = 1, \rho = 6, \delta = 0.01,$$

$$A_{11} = A_{12} = A_{21} = A_{22} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & -1 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0 \\ 15 \end{bmatrix}, C = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}^T,$$

$$R = \begin{bmatrix} 0.1 & 0 & 0 & 0 \\ 0 & 0.1 & 0 & 0 \\ 0 & 0 & 0.1 & 0 \\ 0 & 0 & 0 & 0.1 \end{bmatrix}. \text{ According to the equation (7) and}$$

the parameters of Qball-X4, the following matrix can be obtained,

$$\text{When } \theta = 5^\circ, A_1 = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 43 \\ 0 & 0 & -15 \end{bmatrix}; \text{ When } \theta = 15^\circ,$$

$$A_2 = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 128.99 \\ 0 & 0 & -15 \end{bmatrix}. \text{ Therefore, the weighted multiple-}$$

model structure can be formed by using the model in the case of $\theta = 5^\circ$ and the model in the case of $\theta = 15^\circ$.

Solving the LMI in theorem 1, the coefficient matrixes of the control feedback and the event-triggered mechanism can be derived as follows,

$$K_1 = [-3.78 \quad -6.89 \quad -5.5 \quad 0.73],$$

$$K_2 = [-11.33 \quad -20.68 \quad -16.51 \quad 0.38],$$

$$\Phi = \begin{bmatrix} 1.92 & 0 & 0 & 0 \\ 0 & 1.92 & 0 & 0 \\ 0 & 0 & 1.92 & 0 \\ 0 & 0 & 0 & 1.92 \end{bmatrix}.$$

Consequently, the control algorithm (16) and event-triggered mechanism (12) applied to the control system of Qball-X4 can be determined with the coefficients obtained above. The simulation results are shown as follows.

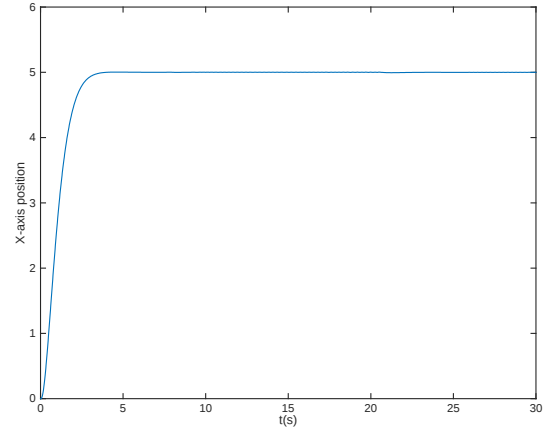


Fig.1. X-axis position response curve

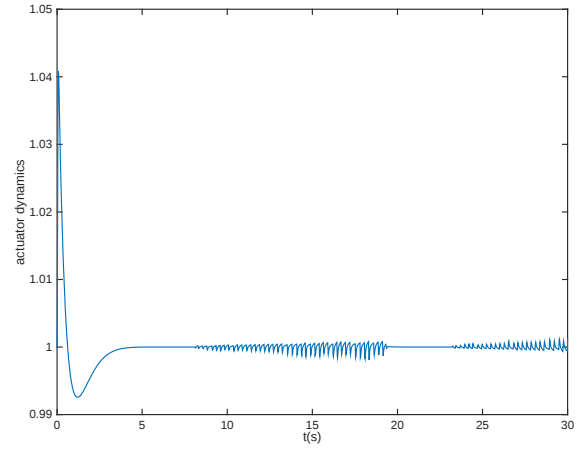


Fig.2. Actuator dynamic response curve

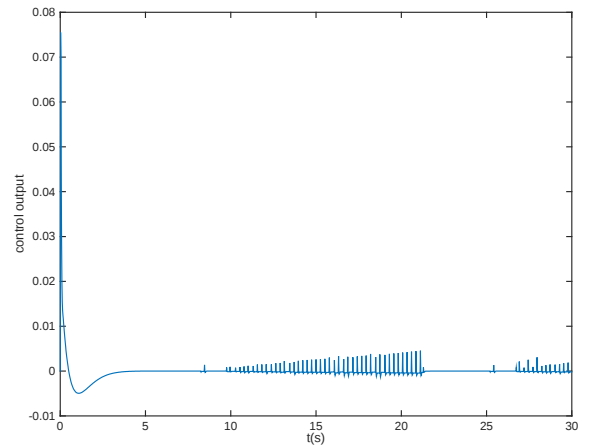


Fig.3. Control output

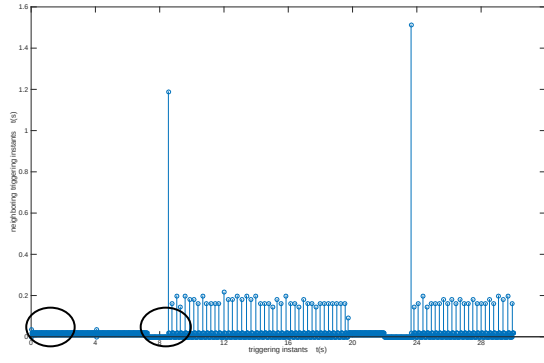


Fig.4. Event-triggering instants

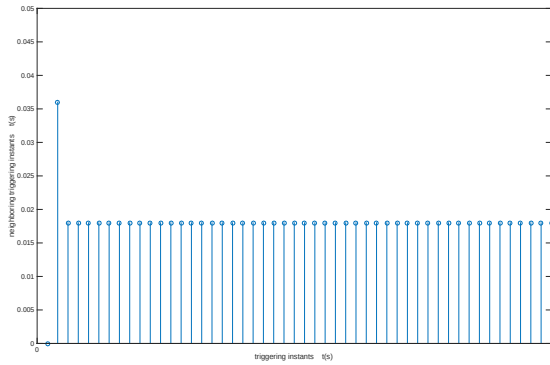


Fig.5. Enlarged detail for the first circle part in Fig.4

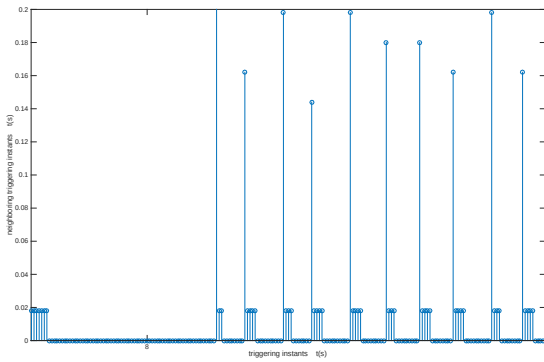


Fig.6. Enlarged detail for the second circle part in Fig.4

From Fig.1, it is shown that the X-axis position can achieve tracking the demand within 5 seconds and keep the position with a satisfied control performance. Fig.2 shows the response of actuator dynamic and Fig.3 shows the response of control output during the tracking period. There are a little vibration in these two figures, which may be caused by external disturbance and long interval between neighboring triggering instants. Fig.4 shows the event-triggering instants by X-axis and interval of neighboring triggering instants by Y-axis. Furthermore, Fig.5 and Fig.6 give the enlarged details for two parts in Fig.4. Both Fig.5 and Fig.6 show clearly that the event-triggering instants do not appear periodically, meaning that the control output does not update periodically.

Sometimes the control algorithm executes even after a long interval from the last execution. Though the system is controlled aperiodically according to the event, the desired robust control performance can be still achieved with less control execution, which is shown in the simulation result figures. That means onboard embedded microprocessor could do less computation for the satisfactory control performance, when the proposed control method has been used in actual.

5. CONCLUSIONS

This paper presents a tracking control approach for the quadrotor UAV system with time-delays based on even-triggered mechanism. For the nonlinearity of UAV dynamic model, the weighted-multiple-model method is used as the basic control structure. And then the event-triggered mechanism is augmented to the structure, forming the aperiodic tracking control law. The robust stability is analyzed for external disturbances and state time-delays by using LMI technology based on a Lyapunov function, in order to meet the expected robust performance index. Finally, the simulation is taken by applying the proposed control approach to Qball-X4. From simulation results, it is shown that the UAV can track the position demand and achieve satisfactory performance with less control execution using the presented control approach. That is to say this control law based on event-triggered mechanism is feasible and effective, which can meet the satisfactory control performance and save the computation resources consumption in the meanwhile.

6. ACKNOWLEDGEMENTS

This work is supported by National Natural Science Foundation of China (61803258), Natural Science Foundation of Shanghai (16ZR1415700), and Shanghai Sailing Program (17YF1408400, 17YF1408300). The authors also gratefully acknowledge the helpful comments and suggestions of the reviewers, which have improved the presentation.

REFERENCES

- Amin R., Aijun L., and Shamshirband S. (2016). A review of quadrotor UAV: control methodologies and performance evaluation. *International Journal of Automation and Control*, 10(2), 87-103.
- Amoozgar M. H., Chamseddine A., and Zhang Y. (2013). Experimental test of two-stage Kalman filter for actuator fault detection and diagnosis of an unmanned quadrotor helicopter. *Journal of Intelligent & Robotic Systems*, 70(4), 107-117.
- Bateman F., Noura H., and Ouladsine M.(2011). Fault diagnosis and fault-tolerant control strategy for the aerosonde UAV. *IEEE Trans. on Aerospace and Electronic System*, 47(3), 2119-2137.
- Besnard L., Shtessel Y. B., and Landrum B. (2012). Quadrotor vehicle control via sliding mode controller driven by sliding mode disturbance observer. *Journal of the Franklin Institute*, 349(2), 658-684.
- Bouadi H., Aoudjif A., and Guenifi M. (2015). Adaptive flight control for quadrotor UAV in the presence of

external disturbances. *6th International Conference on Simulation, and Applied Optimization*, Istanbul, Turkey.

Dhar N. K., Verma N. K., and Behera L. (2018). Adaptive critic based event-triggered control for HVAC system. *IEEE Trans. on Industrial Informatics*, 14(1), 178-188.

Gu Y., Wang H.O., Anaka K., and Bushnell L. (2001). Fuzzy control of nonlinear time-delay systems: stability and design issues. *Proc. ACC*, Washington, DC, USA, 14-23.

Heemels W.P.M.H, Johansson K.H., and Tabuada P. (2012). A introduction to event-triggered and self-triggered control. *IEEE 51st Conference on Decision and Control*, Maui, HI, USA, 3270-3285.

Heemels W. P. M. H., and Donker M. C. F. (2013). Model-based periodic event triggered control for linear systems. *Automatica*, 49(3), 698-711.

Idres M., Makeme B., and Ahmad B. N., et al. (2015). Design, fabrication and flight testing of a surveillance UAV. *Advanced Material Research*, 1115, 450-453.

Mazo M., and Tabuada P. (2008). On event-triggered and self-triggered control over sensor/actuator networks. *IEEE 47th Conference on Decision and Control*, Cancun, Mexico, 435-440.

Mazo M., and Tabuada P. (2011). Decentralized event-triggered control over wireless sensor/actuator networks. *IEEE Trans. on Automatic Control*, 56(10), 2456-2461.

Mobayen S. (2015). An LMI-based robust tracker for uncertain linear systems with multiple time-varying delays using optimal composite nonlinear feedback technique. *Nonlinear Dynamics*, 80(1-2), 917-927.

Peng C., Yue D., and Fei M. (2014). Relaxed stability and stabilization conditions of networked fuzzy control systems subject to asynchronous grades of membership. *IEEE Trans. on Fuzzy Systems*, 22(5), 1101-1112.

Postoyan R., Anta A., Nesic D., and Tabuada P. (2011). A unifying Lyapunov-based framework for the event-triggered control of nonlinear systems. *IEEE 50th Conference on Decision and Control*, Orlando, FL, USA, 2559-2564.

Sahoo A., Xu H., and Jagannathan S. (2016). Neural network-based event-triggered state feedback control of nonlinear continuous-time systems. *IEEE Trans. on Neural Networks and Learning Systems*, 27(3), 497-509.

Tabuada P. (2007). Event-triggered real-time scheduling of stabilizing control tasks. *IEEE Trans. on Automatic Control*, 52(9), 1680-1685.

Wang X., and Lemmon M. (2011). Event-triggering in distributed networked control system. *IEEE Trans. on Automatic Control*, 56(3), 586-601.

Wu W., Reimann S., Gorges D., and Liu S. (2015). Suboptimal event-triggered control for time-delayed linear systems. *IEEE Trans. on Automatic Control*, 60(5), 1386-1391.

Xiao Q., Zhang M., and Hu S. (2010). Adaptive reconfiguration control for fighters based on weighted multiple-model-structure. *Trans. on Nanjing University of Aeronautics & Astronautics*, 27(3), 219-225.

Xiong J., and Zheng E. (2014). Position and attitude tracking control for a quadrotor UAV. *ISA Transactions*, 53(3), 725-731.

Yang P., Pan X., and Liu J. (2017). Optimal fault-tolerant control for UAV systems with time delay and uncertainties over wireless network. *Peer-to-Peer Networking and Applications*, 10, 717-725.

Yang X., and Liu D. (2017). Renewable power system simulation and endurance analysis for stratospheric airships. *Renewable Energy*, 113, 1070-1076.

Zhang W. (2013). Stable weighted multiple model adaptive control: discrete-time stochastic plant. *International Journal of Adaptive Control and Signal Processing*, 27(7), 562-581.

Zhang Z., Lin C., and Chen B. (2015). New stability and stabilization conditions for T-S fuzzy systems with time delay. *Fuzzy Sets and Systems*, 263, 82-91.

Appendix. NOTATIONS

F_e = each of thrust force;

I_i = i -th model corresponding pitch angle θ_i ;

$I_{n \times n}$ = n -dimensional unit matrix;

K_i = control gain matrix;

L = positive gain;

R = given positive definite weighted matrix;

U = total thrust force generated by four rotors;

X, Y, Z = body location in the earth-fixed frame;

a = given constants;

b = given constants;

h = sampling period;

m = body mass;

t_k = current triggering instant;

t_f = finished time of control;

u = PWM (Pulse Width Modulation) which is control input;

v = state variable represented the actuator dynamics of each rotor;

x = state variable of the system

y = output;

y_d = given desired output;

y_c = output of the current controlled system;

Φ = symmetric positive matrix;

γ = given constant;

δ = given positive scalar;

θ = pitch angle;

κ = given bounded positive real number;

ρ = memory factor;

φ = roll angle;

ψ = yaw angle;

ω = actuator bandwidth;

$*$ = transposed elements corresponding to the symmetric position in the matrix.

